

# Solid State Relay

Type:SR4025AE

Order No.:1080001




- Single phase
- Zero cross switching
- Rated operational current:25Aac
- Rated operational voltage:400Vac
- Control input:4-32Vdc
- Output over voltage protection:varistor



Info@wilktronics.com  
+41 91 22 80 062  
Via cantonale 69  
CH - 6805 Mezzovico  
Switzerland  
www.wilktronics.com

## Dimensions(mm)

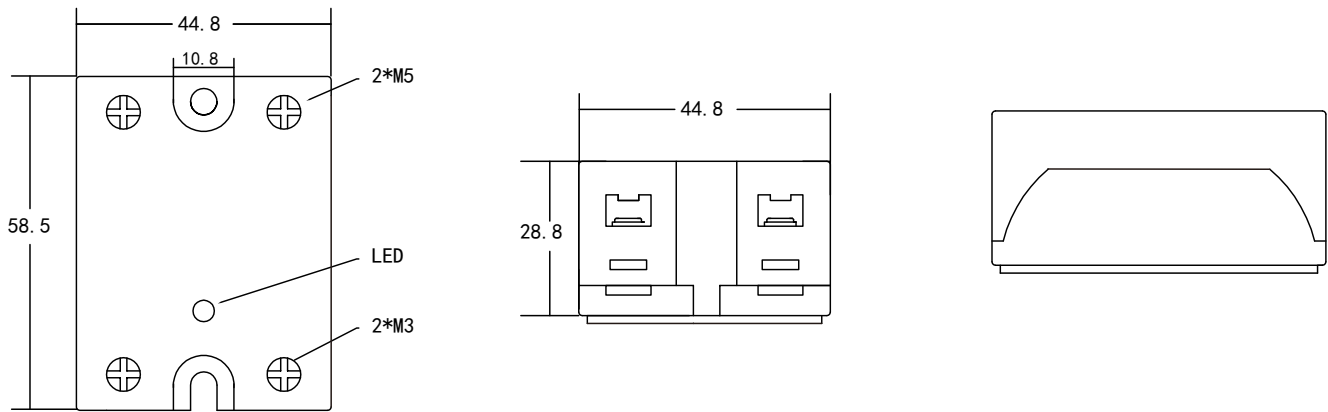

## Inputs Specifications

Control voltage	4-32Vdc
Pick-up voltage	4Vdc
Drop-out voltage	1.2Vdc
Max. input current	15mA
Max. reverse voltage	32Vdc
Response time pick-up	<10ms
Response time drop-out	<10ms

## Outputs Specifications

Rated operational current@Ta=25°C	AC51:25Aac
I <sup>2</sup> t value for fusing (t=10ms)	340A <sup>2</sup> s
Critical rate of rise of on-state current (di/dt)	50A/μs
Non repetitive surge peak on-state current (t=10ms)	250A
Off-state leakage current@rated voltage	<3mAac
Rated operational voltage range	42-440Vac
Operational frequency range	45-65Hz
Critical dV/dt off state min.	1500V/μs
Blocking voltage	1200V
On-state voltage drop @ rated current	1.5V

# Solid State Relay


Type:SR4025AE

Order No.:1080001

## General Specifications

Operating temperature	-20°C - +70°C
Storage temperature	-40°C - +100°C
Housing material	PA66(UL-V0)
Backplate	Aluminum
Isolation: input to output	4 kVac RMS
Approvals	CE

## Heatsink Selection

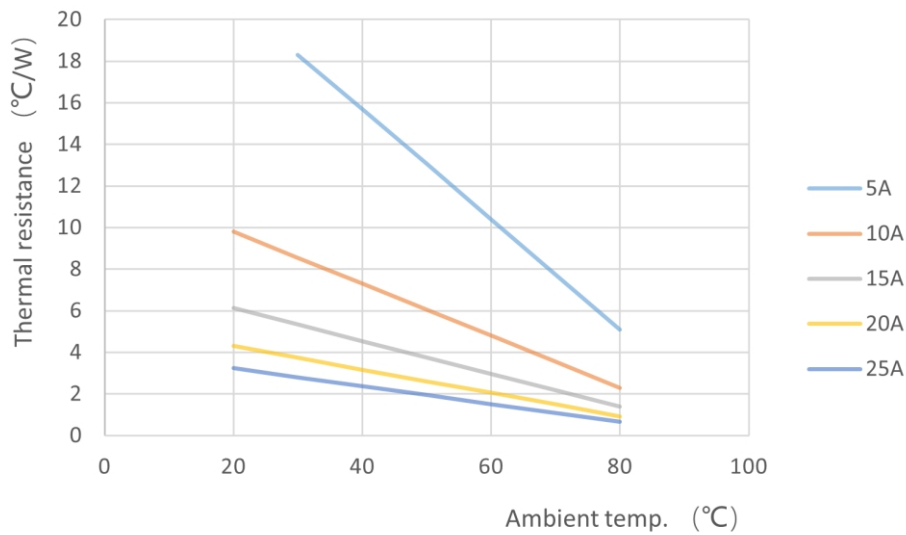

## Wiring Diagram

