

Solid State Relay

Type:SC2325A

Order No.:1090001




- Single phase
- Zero cross switching
- Rated operational current:25Aac
- Rated operational voltage:230Vac
- Control input:4-32Vdc
- Din-rail mounting



Info@wilktronics.com
+41 91 22 80 062
Via cantonale 69
CH - 6805 Mezzovico
Switzerland
www.wilktronics.com

Dimensions(mm)

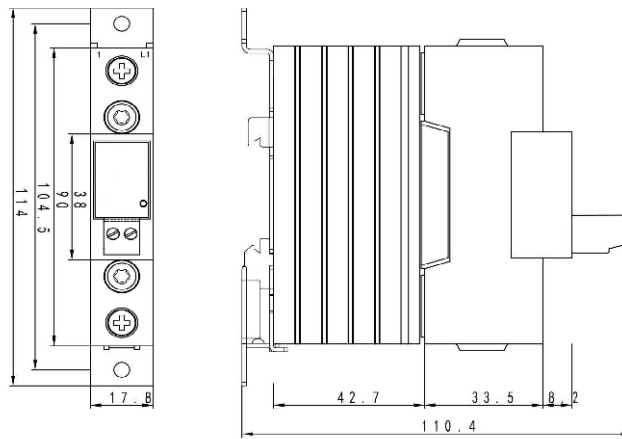

Inputs Specifications

Control voltage	4-32Vdc
Pick-up voltage	4Vdc
Drop-out voltage	1.2Vdc
Max. input current	15mA
Max. reverse voltage	32Vdc
Response time pick-up	<10ms
Response time drop-out	<10ms

Outputs Specifications

Rated operational current@Ta=25°C	AC51:25Aac
I ² t value for fusing (t=10ms)	1000A ² s
Critical rate of rise of on-state current (di/dt)	100A/μs
Non repetitive surge peak on-state current (t=20ms)	420A
Off-state leakage current@rated voltage	<15mAac
Rated operational voltage range	20-275Vac
Operational frequency range	45-65Hz
Critical dV/dt off state min.	1500V/μs
Blocking voltage	800V
On-state voltage drop @ rated current	1.3V

Solid State Relay


Type:SC2325A

Order No.:1090001

General Specifications

Operating temperature	-20°C - +80°C
Storage temperature	-40°C - +100°C
Housing material	PA66(UL94-V0)
Backplate	Aluminum
Isolation: input to output	4 kVac RMS
Approvals	CE

Current Derating

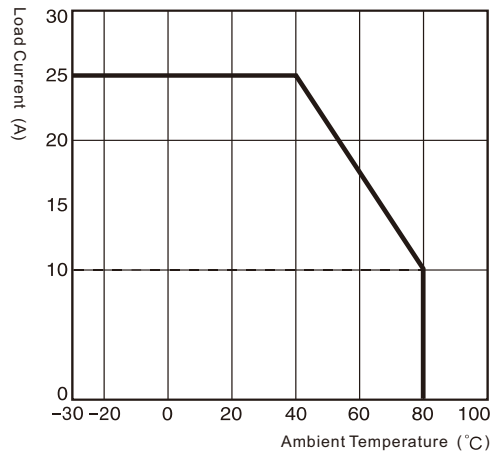

Wiring Diagram

