

Miniature Split Core Current Transformer

CTM Series

- Adaptability and flexibility
- Fast installation




Info@wilktronics.com

+41 91 22 80 062


Via cantonale 69
CH - 6805 Mezzovico
Switzerland

www.wilktronics.com


Dimensions

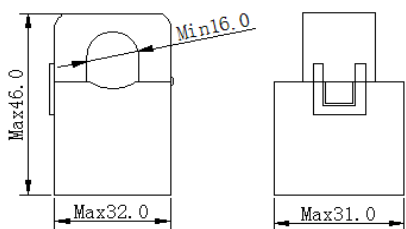

CTM16

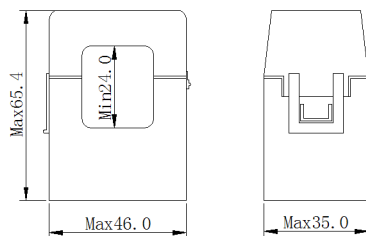


CTM24



CTM36

Wiring Diagrams

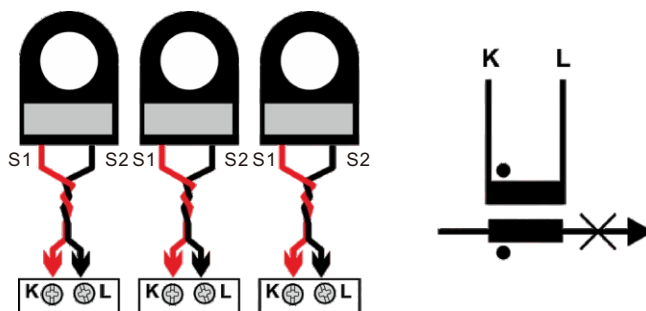

Specifications

Frequency	50/60 Hz
Rated system voltage	660Vac
Insulation voltage	2kV
Operating temperature	-20 °C to +60 °C
Housing material	PA66
Flame retardant properties	UL94-V0
Degree of protection	IP 20
Approval	CE(EN 61869-2)

Miniature Split Core Current Transformer

CTM Series



Type selection

Type	Order No.	Primary Current (A)	Secondary Output (A)	Cable Length	Cross Section	Class	Burden
CTM1670A5A	6020850	70	5	1m	2.5mm ²	1	0.5
CTM1675A5A	6020851	75	5	1m	2.5mm ²	1	0.5
CTM1680A5A	6020852	80	5	1m	2.5mm ²	1	0.5
CTM1690A5A	6020853	90	5	1m	2.5mm ²	1	0.5
CTM16100A5A	6020854	100	5	1m	2.5mm ²	1	0.5
CTM16125A5A	6020855	125	5	1m	2.5mm ²	1	0.5
CTM16150A5A	6020856	150	5	1m	2.5mm ²	1	0.5
CTM16170A5A	6020857	170	5	1m	2.5mm ²	1	0.5
CTM24100A5A	6020801	100	5	1m	2.5mm ²	1	0.5
CTM24150A5A	6020802	150	5	1m	2.5mm ²	1	0.5
CTM24200A5A	6020803	200	5	1m	2.5mm ²	1	1.5
CTM24250A5A	6020804	250	5	1m	2.5mm ²	1	0.5
CTM36100A5A	6020808	100	5	1m	2.5mm ²	1	0.5
CTM36250A5A	6020809	250	5	1m	2.5mm ²	0.5	1.5
CTM36300A5A	6020810	300	5	1m	2.5mm ²	0.5	1.5
CTM36400A5A	6020811	400	5	1m	2.5mm ²	0.5	1.5
CTM36600A5A	6020812	600	5	1m	2.5mm ²	0.5	1.5